

RUCKUS® R350e

Indoor Wi-Fi 6 (802.11ax) Access Point



Benefits

COST EFFECTIVE SOLUTION FOR SMALL FACILITIES

The R350e Wi-Fi 6 (802.11ax) access point (AP) is a cost effective solution that can deliver fast and reliable Wi-Fi services to up to 128 client devices.

INDUSTRY LEADING WI-FI PERFORMANCE

Patented RUCKUS technologies for performance optimization and interference mitigation delivers superior user experience.

MESH NETWORKING

Dynamically create self-forming, self-healing network mesh with RUCKUS patented SmartMesh technology reducing expensive cabling, and complex configurations by checking a box.

MULTIPLE UNIFIED MANAGEMENT OPTIONS

Manage the R350e from the cloud, with on-premises physical/virtual appliances, or without a controller.

KEEP EXISTING SWITCHES AND CABLES

Designed to operate on existing PoE switches and CAT 5e cabling to minimize costly power infrastructure upgrades.

Small facilities can face big-time demands on their wireless infrastructure. Whether staying overnight in a motel, working out of a small office or connecting to a public hotspot, users are often still accessing the same high-bandwidth applications and content they'd consume anywhere else. And they expect reliable connectivity. How can you provide it at a price even the smallest business can afford?

The RUCKUS® R350e delivers consistent, reliable Wi-Fi 6 (802.11ax) wireless networking at an affordable price. The AP features several patented RUCKUS technologies for performance optimization and interference mitigation found in our premier access points, delivering superior user experiences. But it provides them in an ultra-compact form factor built for small venues—with a price tag to match.

The R350e is an ideal choice for low-density environments with less coverage areas including small and medium-size economy hotels and motels, small and medium-size businesses, retail locations, restaurants, and multi-tenant small offices and branch offices.

The R350e Wi-Fi 6 AP incorporates patented technologies found only in the RUCKUS Wi-Fi portfolio.

- Improve throughput with ChannelFly®, which dynamically finds less congested Wi-Fi channels to use.
- Supports up to 128 clients and 8 SSIDs per AP.

The R350e provides an ideal combination of features and performance for smaller environments at a price any business can afford.

RUCKUS® R350e

Indoor Wi-Fi 6 (802.11ax) Access Point

Access point antenna pattern

RUCKUS superior antenna technology enables the best possible connection with every devices, delivering

- Better Wi-Fi coverage
- Reduced RF interference

Figure 1. R350e 2.4GHz Azimuth Antenna Patterns





Figure 2. R350e 5GHz AzimuthAntenna Patterns



Figure 3. R350e 2.4GHz Elevation Antenna Patterns



Figure 4. R350e 5GHz Elevation Antenna Patterns

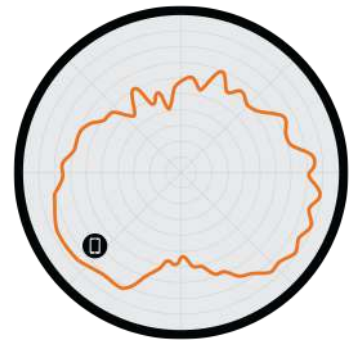

RUCKUS[®] R350e

Indoor Wi-Fi 6 (802.11ax) Access Point



368g (13 oz)



RUCKUS[®] R350e

Indoor Wi-Fi 6 (802.11ax) Access Point

Wi-Fi	
Wi-Fi Standards	IEEE 802.11a/b/g/n/ac/ax
Supported Rates	802.11ax: 4 to 1774 Mbps 802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2 for VHT20/40/80) 802.11n: 6.5 Mbps to 300 Mbps (MCS0 to MCS15) 802.11a/g: 54, 48, 36, 24, 18, 12, 9, 6Mbps 802.11b: 11, 5.5, 2 and 1 Mbps
Supported Channels	2.4GHz: 1-13 5GHz: 36-64, 100-144, 149-165
MIMO	2x2 SU-MIMO 2x2 MU-MIMO
Spatial Streams	2 streams SU/MU-MIMO 5GHz 2 streams SU/MU-MIMO 2.4GHz
Radio Chains and Streams	2x2:2 (5 GHz) 2x2:2 (2.4GHz)
Channelization	20, 40, 80MHz
Security	- WPA-PSK, WPA-TKIP, WPA2 , WPA3-Personal, WPA3-Enterprise, AES, WPA3, 802.11i, Dynamic PSK - WIPS/WIDS
Other Wi-Fi Features	- WMM, Power Save, Tx Beamforming, LDPC, STBC, 802.11r/k/v - Hotspot - Hotspot 2.0 - Captive Portal - WISPr

RF	
Antenna Gain (max)	Up to 3dBi
Peak Transmit Power (aggregate across MIMO chains)	2.4GHz: 22 dBm 5GHz: 22 dBm
Minimum Receive Sensitivity ¹	-101 dBm
Frequency Bands	- ISM (2.4-2.484GHz) - U-NII-1 (5.15-5.25GHz) - U-NII-2A (5.25-5.35GHz) - U-NII-2C (5.47-5.725GHz) - U-NII-3 (5.725-5.85GHz)

2.4GHZ RECEIVE SENSITIVITY (dBm)			
HT20		HT40	
MCS0	MCS7	MCS0	MCS7
-94	-70	-91	-72
HE20		HE40	
MCS0	MCS7	MCS0	MCS7
-94	-70	-91	-72

5GHZ RECEIVE SENSITIVITY (dBm)					
VHT20		VHT40		VHT80	
MCS0	MCS7	MCS0	MCS7	MCS0	MCS7
-95	-76	-92	-73	-89	-70
HE20		HE40		HE80	
MCS0	MCS7	MCS0	MCS7	MCS0	MCS7
-95	-76	-92	-73	-89	-70

2.4GHZ TX POWER TARGET	
Rate	Pout (dBm)
MCS0 HT20	19
MCS7 HT20	14
MCS8 VHT20	13.5
MCS9 VHT40	12
MCS11 HE40	11

5GHZ TX POWER TARGET	
Rate	Pout (dBm)
MCS0 VHT20	19
MCS7 VHT20	16
MCS0 VHT40, VHT80	19
MCS7 VHT40, VHT80	16
MCS11, HE20, HE40, HE80	12

PERFORMANCE AND CAPACITY	
Peak PHY Rates	2.4GHz: 574Mbps 5 GHz: 1200Mbps
Client Capacity	Up to 128 clients per AP
SSID	Up to 8 per AP (4 per band)

RUCKUS RADIO MANAGEMENT	
Wi-Fi Channel Management	- ChannelFly - Background Scan Based
Client Density Management	- Adaptive Band Balancing - Client Load Balancing - Airtime Fairness - Airtime-based WLAN Prioritization
SmartCast Quality of Service	- QoS-based scheduling - Directed Multicast - L2/L3/L4 ACLs
Mobility	SmartRoam

¹ Rx sensitivity varies by band, channel width and MCS rate.

RUCKUS® R350e

Indoor Wi-Fi 6 (802.11ax) Access Point

Networking	
Controller Platform Support	- RUCKUS One - SmartZone - Unleashed²
Mesh	SmartMesh™ wireless meshing technology. Self-healing Mesh
IP	IPv4, IPv6
VLAN	802.1Q (1 per BSSID or dynamic per use based on RADIUS) - VLAN Pooling - Port-based
802.1x	Authenticator & Supplicant
Policy Management Tools	- Access Control Lists - Device Fingerprinting - Rate Limiting

Physical Interfaces	
Ethernet	1 x 1GbE port, RJ-45
USB	Disabled

Physical Characteristics	
Physical Size	14.60(L) x 15.59(W) x 3.93(H) cm 5.75(L) x 6.14(W) x 1.55(H) in
Weight	368g (13 oz)
Mounting	- Wall, Drop ceiling, Desk - Secure bracket (sold separately)
Physical Security	- Hidden latching mechanism - T-bar Torx
Operating Temperature	0 °C (32 °F) to 40 °C (104 °F)
Operating Humidity	Up to 95%, non-condensing

Power ³	
Power Supply	Maximum Power Consumption
PoE (Full Functionality)	12.62W
DC input	11.4 W

Certifications and Compliance	
Wi-Fi Alliance ⁴	- Wi-Fi CERTIFIED™ a, b, g, n, ac - Wi-Fi CERTIFIED 6™ - WPA3™ -Enterprise, Personal - Wi-Fi Enhanced Open™ - Wi-Fi Agile Multiband™ - Passpoint® - Vantage - WMM
Standards Compliance ⁵	- EN 60950-1 Safety - EN 60601-1-2 Medical - EN 61000-4-2/3/5 Immunity - EN 50121-1 Railway EMC - EN 50121-4 Railway Immunity - IEC 61373 Railway Shock & Vibration - UL 2043 Plenum - EN 62311 Human Safety/RF Exposure - WEEE & RoHS - ISTA 2A Transportation

Software and Services	
Network Analytics	RUCKUS® AI
Security and Policy	Cloudpath

Ordering Information	
901-R350-XX03	R350e dual-band (5GHz and 2.4GHz concurrent) 802.11ax Entry-Level wireless access point (up to 128 concurrent clients), 2x2:2 streams (2.4GHz/5GHz), PoE support. Does not include power adaptor or PoE injector. Includes 1 year Limited Warranty.

Warranty: Sold with a 1 year limited warranty.
For details see: <http://support.ruckuswireless.com/warranty>.

Optional Accessories	
902-0162-XXYY	PoE injector (24W) (Sold in quantities of 1, 10 or 100)
902-0195-0000	Spare, T-bar ceiling mount kit for mounting to flush frame ceiling
902-0120-0000	Spare, Accessory Mounting Bracket
902-0173-XXYY	Power Adapter (12V, 1.0A, 12W) (Sold in quantities of 1 or 10)

PLEASE NOTE: When ordering Indoor APs, you must specify the destination region by indicating -US or -WW, instead of XX. When ordering PoE injectors or power supplies, you must specify the destination region by indicating -US, -EU, -AU, -BR, -CN, -IN, -KR, -SA, -UK, or -UN instead of -XX.

Packaging Dimensions and Weight	
Package Size	19.40(L) x 19.4(W) x 6.9(H) cm 7.64(L) x 7.64(W) x 2.71(H) in
Package Weight	544g (19.2 oz)

² Refer to Unleashed datasheets for SKU ordering information.
³ Max power varies by country setting, band, and MCS rate.
⁴ For complete list of WFA certifications, please see the Wi-Fi Alliance website.
⁵ For current certification status, please see the price list.

RUCKUS[®] R350e

Indoor Wi-Fi 6 (802.11ax) Access Point

About RUCKUS Networks

RUCKUS Networks builds and delivers purpose-driven networks that perform in the demanding environments of the industries we serve. Together with our network of trusted go-to-market partners, we empower our customers to deliver exceptional experiences to the guests, students, residents, citizens and employees who count on them.

www.ruckusnetworks.com

Visit our website or contact your local RUCKUS representative for more information.

© 2024 CommScope, LLC. All rights reserved.

All trademarks identified by ™ or ® are trademarks or registered trademarks in the US and may be registered in other countries. All product names, trademarks and registered trademarks are property of their respective owners. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services.

PA-118274.1-EN (7/24)

RUCKUS[®]
COMMScope